

Document Solutions

> PRINT > COPY > SCAN > FAX

TASKalfa 7002i TASKalfa 8002i TASKalfa 9002i TASKalfa 8052ci

COLOR/MONOCHROME MULTIFUNCTION PRODUCT FOR A4/A3 FORMAT

ENFORCE MULTIFUNCTIONAL POWER AND MOBILITY OFFICE



- High image quality with 1,200dpi printing resolution.
- Fast first copy time (mono: 4.8 seconds; color: 5.9 seconds) *.
- 320GB hard disk capacity and 4.5GB RAM to meet heavy duty tasks without additional hard drive.
- Support A6 original scanning from Document Processor with dual scan speed up to 220/220 ipm A4 Mono/Color.
- Support size 12" x 18" (304mm x 457mm) & 300g/m² paper.
- Support Banner Print and Scan.

*For TASKalfa 8052ci





Born to be Extraordinary

KYOCERA Document Solutions is Extraordinary for


- Broad Range of Multifunction Devices and Printers
- Optimized Total Cost of Ownership (TCO)
- Reliable with Long Life Drum and Parts
- New and Advanced Technology

KYOCERA Document Solutions strives to be a company that contributes to the society and demonstrates "Customer First" principle by providing customers with maximum value to increase their satisfaction. By adhering to the mission of producing document management devices that take balance between "Economy" and "Ecology", KYOCERA Document Solutions succeeds to develop document management devices with advanced technologies which help customers to optimize office productivity and efficiency at a low total cost of ownership and, at the same time, improving environmental performance.

Advanced Functionality

Designed with wide screen touch panel and simple operation, these multi-faceted devices offer impressive speed, large output capacity and bring high quality color print for business. They are ideal for handling day-to-day document and streamlining workflow with sophiscated KYOCERA business applications.

Superior Technology

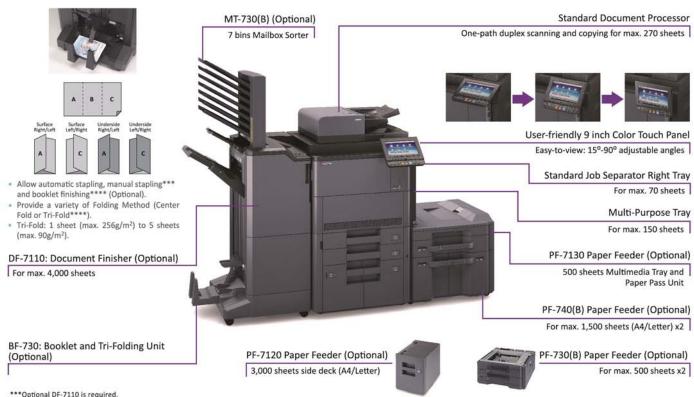

^{***}Optional DF-7110 is required.
**** Optional DF-7110 & BF-730 are required.



Superior Performance in COPY/PRINT/SCAN/FAX

- Test Copy: Reduce miscopy when copying large volume by using the Test Copy mode.
- Duplex Preview: Display both front and back sides before printing (Copy/Box Print function).
- Skip Blank Page: Blank page is skipped during making scans/copies to save unnecessary cost.
- Dedicated Preset Copy Mode for Special Original Media: Newspaper Copy, Technical Drawing Copy, ID Copy, Highlighter Copy (reproduce fluorescent colors clearly).




- Prevent Bleed-thru: Remove unwanted background when copying or scanning printed double-sized thin paper (e.g. newspaper, NCR paper, and magazine).
- Carbon Copy: Print an additional copy or copies of a document from a different media source or using a different media type.
- Banner Send & Print: Scan and produce banner with various paper weight in-house anytime in need (One-sided only).




- Cluster Printing: Enhance productivity by executing one print job via 2 to 4 designated KYOCERA devices with optional KYOCERA Business Application.
- Customize Scan Split: Scan by split at specified page and allow send all scan files via one email or send files separately by emails.





- USB Scan to/Direct Print: Scan to or print directly from USB Memory in PDF, PDF/A, TIFF, JPEG or XPS format.
- Scanned Image File Size Check: Check the actual scanned document size does not exceed limit before actual sending to e-mail.


 FTP/SMB/Email/Fax Multi-Sending: Send document to different destinations (email addresses, folders, etc.) in a single scan operation.

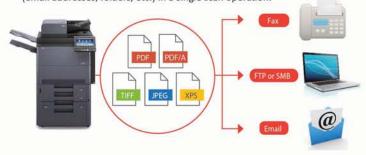

 Simple Fax Forwarding: Forward any incoming fax to other destinations by Email, SMB or FTP (Optional).



- I-FAX Sending (Optional): Send and receive i-FAX without the mail service by installing Direct SMTP function.
- Job Skip: Automatically prioritize the error print job to avoid machine come to a halt in case of

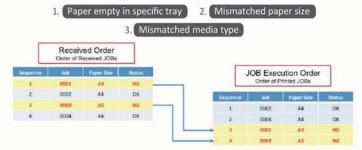

 Job Finish Notice: Send email notification to specified user when a copy/scan job is completed.





Maximize Efficiency

- Intuitive natvigation: Excellent clarity 9 inch color touch panel display with swivel type operability similar to smart phone and tablet and tiltable from 15 degree to 90 degree.
- Convenience to use Keypad: With on-screen virtual numeric keypad (hardware keypad is optional), users can type
 in with ease.
- Home Screen: All commonly used functions and applications are found on default Home Screen. The Home Screen
 can be customized easily to meet different use (or Group User) needs for immediate access to commonly used
 functions.



- · Printer Driver's Quick Print Tab: Create and save frequently used custom profiles as graphic icons to allow programming of complex jobs in one click.
- Custom Box: Ease-of-use Custom Box provides long term job storage at device, allowing users to securely print and store jobs on the device and output them when required.

Superior Quality

- Powerful color performance*
 - Vibrant color* with 1,200 x 1,200 dpi print resolution.
- Contrast selection with copy/scan.
- Multiple Image Adjustment Tools for optimal output:
 - Color Optimizer at KYOCERA KX Driver*: Allow users to adjust the pixels near the color value or color space of defined areas instead of the entire image by selecting 2 from 3 parameters (Hue, Light, Saturation) and add up to 10 colors in each adjustment settings.
 - One-Touch Color Image Adjustment*: Total 9 photo adjustment modes to select optimal settings for photo image (Portrait; Blue Scenery; Green Scenery;
 Vivid; Soft; Sharp; Smooth; Light; Heavy).
 - Print Gray with Black Toner*: Improve text recognition and decreases color shadowing to reproduce accurate grayscale image.









Transform Business with KYOCERA Solutions

KYOCERA Mobile Print: An app-based solution that enables users to simply
and conveniently print documents, web pages, and images on demand from
virtually anywhere, on their Apple and Android smartphone and tablet devices
to select KYOCERA MFPs and printers. Users can also scan files and images
from same MFPs to their mobile devices. Our devices also support AirPrint for
iPhone and iPad.

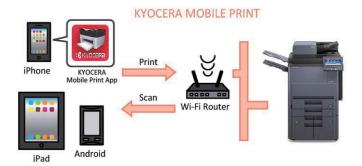

 KYOCERA MyPanel: Use smartphone or tablet to connect a compatible networked KYOCERA printing device on your local Wi-Fi network wirelessly.
 Users can perform COPY/PRINT/SCAN from Custom Box or Cloud## by mobile devices with personalize settings.

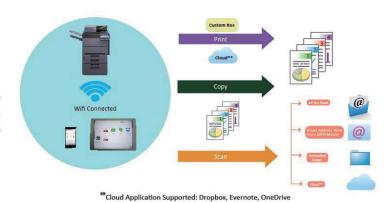

- KYOCERA Cloud Connect (Optional): Retrieve and print files in Google Drive
 and Evernote®, a cloud service provider, directly from any KYOCERA HyPASenabled MFPs. Users can even upload scanned files directly to Google Drive
 and Evernote® directly from the MFP, without going through a computer.
- Support WiFi Direct: Support IB-35 Wireless LAN (Optional), makes print/scan
 via AirPrint/Google Cloud Print/Mopria/KYOCERA Mobile Print/KYOCERA
 MyPanel much easier.





Control with Ease

- Password Protection Setting: Allow administrator to set Password Policy to limit user access to designated capacity.
- Private Print: Release print job at the device by entering a preset four-digit access code when making a print at KYOCERA KX Driver.
- With the aid of Network Authentication, IT Department can manage user authentication easily by incorporating with centralized Authentication Server (NTLM, Kerberos, KYOCERA Net Manager*).

 Server
- FAX Memory Overwrite (Optional): Erase FAX memory after sending or receiving for confidentiality.
- Security Watermark: Distinguish original from copies and provides protection for sensitive document against duplication.

PASSWORD

* Optional

- M-Files (Optional): Manage all information e.g. documents, projects and business processes etc and adds intelligence by combining it with information from other systems (like SharePoint, Salesforces and SAP). This ensures you always find what you need, no matter what system you are using.
 - Window Client
 XP/Vista/7/8/8.1/10
 Web Browser
 IE/Chrome/Firefox/Safari
 IOS/Android/Windows Phone
 IOS/Android/Windows 8
- KYOCERA Data Security Kit (Optional): Encrypt data before storing in the hard drive and automatically overwrite all data stored in the hard drive when the data becomes unnecessary.





Eco-Conscious

Design for energy savings

- Fast warm up: With the new IH fuser, the warm up time is shorter and power consumption is less.
- Weekly Timer: Allow administrator to preset the machine on and off time to maximize power savings.
- EcoPrint: Flexible EcoPrint setting to consume less energy and toner.
- Energy Saver: 1w or less power consumption at Energy Saver Mode.

Protect the environment

- Leading Long-life Mega Surface Amorphous Silicon (a-Si) Drum, developer and replacement parts.
- · Parts for Recycling.
- Non-toxic Materials.
- Quiet operation design for a comfortable Working Environment.







Law on Promoting Green Purchasing (Japan)

KYOCERA Document Solutions has been actively promoting the acquisition of various environment labels, aiming to provide products that are safe and comfortable for our customers to use and have minimal environmental impact.

Instant Monitoring

Smart utilities for managed print and minimize related device management costs.

 KYOCERA Command Center RX: By using a web brower, the authorized administrator can access the built-in KYOCERA Command Center RX and check the operation status of the device, toner level, paper availability, as well as change settings related to security, network printing and advanced network setting etc.



 KYOCERA Net Viewer: A comprehensive network management tool used to monitor, maintain, and update up to 100 network printing devices locally and remotely. Through KYOCERA Net Viewer, administrators can simply install and update firmware on all KYOCERA connected devices while easily monitoring printed black/color pages, device configuration, accounting, toner usage, and alerts. By implementing KYOCERA Net Viewer, the manpower required to monitor connected devices is greatly reduced.



KYOCERA Net Manager (Optional): Protect confidential data, manage & control the overall output (copy/print/scan) and get detailed reports. Users can keep an overview of personal printing jobs with web browser. It greatly simplifies scanning processes as it automatically displays a set of personalized options.

By adding the Card Authetication Kit (Optional) for KYOCERA Net Manager, you are able to swipe ID Card to get print document directly. User administrator can also set the IC Cards to allow quick and secure access with pre-defined user restrictions such as color output restrictions and output quota.



			Main Specil			
Model		TASKalfa 7002i	TASKalfa 8002i	TASKalfa 9002i	TASKalfa 8052ci	
Main Function		IASKalfa /002l		100000000000000000000000000000000000000	IASKalfa 8052Cl	
NAMES OF TAXABLE PARTY.			Copy, Print, Scan,			
Writing Method			Semiconduct T1024 (Quad Co			
Print Speed (A4)	(Mono/Color)	70/ - ppm	80/ - ppm	90/ - ppm	80/70 ppm	
Scanning Speed Simplex(Mono/Color)			120/120	The same of the sa		
(A4) 300dpi Duplex(Mono/Color)		220/220 ipm				
Memory		Standard 4.5GB (Max. 4.5GB)				
SSD/HDD Capacity			SSD 8GB (Standard) / HDD 320GB (Standard)			
Warm Up Time		30 seconds or less 44 seconds or less 4,150 sheets [2 x 500 sheets (Cassette) + 2 x 1,500 sheets (Cassette) + 150 sheets (MPT)]			44 seconds or less	
Paper Capacity Paper Size	Standard Maximum	7,650 sheets (Main Unit + 2 x 1,500 sheets PF-740(B) x1 + 500 sheets PF-7130 x1 + MPT)				
	Cassette	7,650 sneets (Main Onit + 2 x 1,500 sneets PF-740(B) x1 + 500 sneets PF-7130 x1 + MP1) Min. ASR - Max. 12" x 18"(304mm x 457mm)				
	MPT	Min. A6R - Max. 12" x 18"(304mm x 457mm) & Banner Print of 1,219mm				
aper Weight	Cassette	60 - 256 g/m ²				
MPT		60 - 300 g/m ²				
Ouplex Printing			Paper size: A6R – 12" x 18" (304mm x 45	Charles Andrew Control		
utput Capacity	0.		Max. 420 :			
Control Panel Dimension (W x D x H) (Main Unit)		9 inch Color Touch LCD Panel 685mm v. 801mm v. 1.234mm (with DP)				
Veight (Main Ur		685mm x 801mm x 1,234mm (with DP) Approx. 155 kg Approx. 185 kg				
ower Consump		1,110W	1,170W	1,340W	1,360W	
Standard	Stand-by Mode	1	100W	77	120W	
onfiguration)	Energy Saver	1W				
oise	Copy/Print Mode					
507779/ ISO92		58dB(A)				
	The state of the s		Copy Functions	(Standard)		
opy Size			Max. A3 (Ledger			
esolution			600 x 60			
rst Copy Time ((Mono/Color)	5.2/ - seconds	4.7/ - seconds	3.6/ - seconds	4.8/5.9 seconds	
oom Ratio	Manual		25% - 400% (19	6 per Step)		
	Pre-defined	5RSE				
fultiple Copy			1 – 99	99		
			Print Functions			
Resolution						
			1,200 x 1,200 dpi; 4,80	Name and the State of the State		
PDL	(5.1)		(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com	patible), XPS, OpenXPS, PDF Direct Print	The state of the s	
PDL First Print Out Ti	me (Mono/Color)	5.8/ - seconds	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds	4.9/6.1 seconds	
DL	3	5.8/ - seconds	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour	4.9/6.1 seconds	
DL irst Print Out Ti letwork Printing	3	5.8/ - seconds	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 1/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, , Windows Server 2008, Windows Server Windows Vista, Windows 7, Windo	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10;	4.9/6.1 seconds	
DL irst Print Out Ti letwork Printing Operating Syster	3	5.8/ - seconds TCF Windows Server 2003	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 17/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux	4.9/6.1 seconds is Server 2012 R2,	
DL irst Print Out Ti letwork Printing Operating Syster nterface	3 n Supported	5.8/ - seconds	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds rylp, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X L00BASE-TX/1000BASE-T; USB Host Interf	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)X4; NFC TAGX1; 802.11 b/g	4.9/6.1 seconds is Server 2012 R2,	
DL irst Print Out Ti letwork Printing Operating Syster Interface USB Memory Pri	3 n Supported	5.8/ - seconds TCF Windows Server 2003	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 17/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g	4.9/6.1 seconds	
DL irst Print Out Ti letwork Printing operating Syster interface ISB Memory Pri	3 n Supported	5.8/ - seconds TCF Windows Server 2003	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds rylp, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g	4.9/6.1 seconds	
DL irst Print Out Ti letwork Printing perating Syster aterface ISB Memory Pri flobile Printing	3 n Supported	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds rylp, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS EERA Mobile Print (Standard)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti letwork Printing iperating Syster interface ISB Memory Pri Mobile Printing olor Selection	3 n Supported	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds rylp, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows 88, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti letwork Printing sperating Syster aterface ISB Memory Pri dobile Printing olor Selection esolution	3 n Supported	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/:	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds P/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions o Color (Color/Gray); Auto Color (Color/Bi	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS - ERA Mobile Print (Standard) & W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi	4.9/6.1 seconds as Server 2012 R2, s/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti letwork Printing sperating Syster interface ISB Memory Pri flobile Printing olor Selection esolution ille Format mage Type Mod	3 in Supported inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYOU Scan Functions o Color (Color/Gray); Atu Color (Color/B: 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo,	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti etwork Printing perating Syster atterface SB Memory Pri flobile Printing olor Selection esolution lle Format mage Type Mod ransmission Typ	3 in Supported inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X L00BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions o Color (Color/Gray); Auto Color (Color/B 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan;	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti etwork Printing perating Syster atterface SB Memory Pri flobile Printing olor Selection esolution lle Format mage Type Mod ransmission Typ	3 in Supported inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X L00BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions o Color (Color/Gray); Auto Color (Color/B 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) 3kW); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti etwork Printing perating Syster atterface SB Memory Pri Tobile Printing olor Selection esolution lie Format mage Type Mod ransmission Typ ddress Storage	3 in Supported inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X L00BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions o Color (Color/Gray); Auto Color (Color/B 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) 3kW); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; s), 500 groups (Group address list) (Optional)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti ietwork Printing iperating Syster interface ISB Memory Pri flobile Printing olor Selection esolution ille Format mage Type Mod ransmission Typ ddress Storage iriginal Size	3 in Supported inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions 0 Color (Color/Gray); Auto Color (Color/Bi 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/IPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS ERA Mobile Print (Standard) 3, Windows 8.1, Windows 10; 1, 200x400dpi, 200x100dpi 2, DF, PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; 1, 500 groups (Group address list) (Optional) / Scanning length: max. 1,600mm	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti etwork Printing perating Syster sterface SB Memory Pri tobile Printing olor Selection esolution lle Format mage Type Mod ransmission Typ ddress Storage riginal Size oding Method	n Supported Inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYOI Scan Functions O Color (Color/Gray); Auto Color (Color/B: 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS EERA Mobile Print (Standard) \$WJ; Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR St; Scan to USB; TWAIN Scan; WSD Scan; s1), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm MH, JBIG	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti etwork Printing perating Syster sterface SB Memory Pri tobile Printing olor Selection esolution elle Format mage Type Mod ransmission Typ ddress Storage viriginal Size oding Method ransmission Spe ransmission Spe	n Supported Inting Format	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions 0 Color (Color/Gray); Auto Color (Color/Bi 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/IPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) & W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm MH, JBIG	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti etwork Printing perating Syster interface SB Memory Pri flobile Printing olor Selection esolution ile Format mage Type Mod ransmission Typ ddress Storage viriginal Size oding Method ransmission Spo	an Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, 4, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYOO Scan Functions 6 Color (Color/Gray); Auto Color (Color/Bi 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address liss Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, MR, MR, MR, MR, MR, MR, MR, MR,	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standard) & W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm MH, JBIG	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL irst Print Out Ti- irst Print Out Ti- ietwork Printing iperating Syster interface ISB Memory Pri Mobile Printing olor Selection esolution ille Format mage Type Mod ransmission Typ ddress Storage briginal Size oding Method ransmission Spo	an Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYOO SCAN FUNCTIONS 0 Color (Color/Gray); Auto Color (Color/Bi 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, M 33.6 kg 170M	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standaird) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) J/ Scanning length: max. 1,600mm JH, JBIG Jbbs B	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
DL rst Print Out Ti etwork Printing perating Syster atterface SB Memory Pri lobile Printing olor Selection esolution le Format mage Type Mod ransmission Typ ddress Storage riginal Size ording Method ransmission Spe lemory UAL FAX / Netw	m Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Open	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYOU Scan Functions o Color (Color/Gray); Audto Color (Color/Gray) COMPANDED (Color/Gray); Audto Color (Color/Gray); Audto Col	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/g DF, XPS CERA Mobile Print (Standaird) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) J/ Scanning length: max. 1,600mm JH, JBIG Jbbs B	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option	
or selection associated ansmission Typeddress Storage original Size orig	m Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 1.00BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions O Color (Color/Gray); Auto Color (Color/B: 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis- Fix Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS EERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; i), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm //H, JBIG // BS AMS AMS AMS AMS AMS AMS AMS AMS AMS AM	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
irst Print Out Tiletwork Printing Operating Syster Interface USB Memory Printing Color Selection Resolution Re	m Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, y, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYOU Scan Functions o Color (Color/Gray); Audto Color (Color/Gray) COMPANDED (Color/Gray); Audto Color (Color/Gray); Audto Col	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; s1), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm AH, JBIG bis B & Options:	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
irst Print Out Til letwork Printing Operating Syster Interface USB Memory Pri Mobile Printing Color Selection Resolution	m Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, IVP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf Tiff, JPEG, F AirPrint, Mopria, KYOI Scan Functions O Color (Color/Gray); Auto Color (Color/B: 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High— Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G 12; PF-740(B): 1,500 sheets X2 (A4/Letter) PF-7130: 500 sheets Multimed PH-7C: Punch Unit for DF-7110: 4,000 sh PH-7C: Punch Unit for DF-7110: Staple for	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS TERA Mobile Print (Standard) SWJ; Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; s), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm MH, JBIG bbs B & Options ; PF-7120: 3,000 sheets Large capacity sid ia Tray and Paper Pass Unit eets Finisher; MT-730(B): 7 Bin Mailbox; r BF-730; SH-12: Staple for DF-7110	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til irst Print Out Til ietwork Printing iperating Syster interface ISB Memory Pri Mobile Printing olor Selection esolution ille Format mage Type Mod ransmission Typ ddress Storage original Size oding Method ransmission Spe idemory PUAL FAX / Netw oner Kit Asintenance Kit Asintenance Kit aper Feeder inisher	m Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions O Color (Color/Gray): Auto Color (Color/B: 600dpi, 400dpi, 300dpi, 200dpi NXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G 12; PF-740(B): 1,500 sheets x2 (A4/Letter) PF-7130: 500 sheets x2 (A4/Letter) PF-710: Booklet Folder; SH-10: Staple fo Fax Syste	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; s1), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm AH, JBIG bibs B & Options ; PF-7120: 3,000 sheets Large capacity sid ia Tray and Paper Pass Unit eets Finisher; MT-730(B): 7 Bin Mailbox; r BF-730; SH-12: Staple for DF-7110 m 12	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option s, Searchable PDF WIA Scan TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til irst Printing Syster interface ISB Memory Pri Mobile Printing olor Selection esolution ille Format mage Type Mod ransmission Typ ddress Storage original Size oding Method ransmission Spe femory UAL FAX / Netw oner Kit Maintenance Kit aper Feeder inisher ax System nternet FAX	m Supported Inting Format Ide	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 6.4/ - se	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS CERA Mobile Print (Standard) & Wy; Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm AH, JBIG bbs B Options PF-7120: 3,000 sheets Large capacity sic ia Tray and Paper Pass Unit eets Finisher; MT-730(B): 7 Bin Mailbox; r BF-730; SH-12: Staple for DF-7110 m 12 X Kit(A)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til etwork Printing perating Syster atterface SB Memory Pri flobile Printing olor Selection esolution ele Format mage Type Mod ransmission Typ ddress Storage viriginal Size oding Method ransmission Spe flemory UAL FAX / Netw daintenance Kit daintenance Kit daper Feeder inisher ax System externet FAX ata Security	S m Supported Inting Format Ide Dee Dee Dee Dee Dee Dee Dee	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 6.4/ - se	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm MH, JBIG bbs B Options PF-7120: 3,000 sheets Large capacity sid a Tray and Paper Pass Unit eets Finisher; MT-730(B): 7 Bin Mailbox; rr BF-730; SH-12: Staple for DF-7110 m 12 x Kiti(A) by Kit(E)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til irst Print Out Til irst Print Out Til irst Print Out Til itetwork Printing iperating Syster interface ISB Memory Pri iflobile Printing olor Selection esolution ille Format mage Type Mod ransmission Typ ddress Storage iriginal Size oding Method ransmission Spr demory UUAL FAX / Netw oner Kit Maintenance Kit aper Feeder inisher ax System internet FAX ata Security ard Authentical	an Supported Inting Format Ide Dee Dee Dee Dec Dec Dec Dec D	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, IVP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions Ocolor (Color/Gray); Auto Color (Color/Bi 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address list Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G 12; PF-740(B): 1,500 sheets x2 (A4/Letter) PF-7130: 4,000 sh PH-7C: Punch Unit for DF-7110; BF-730: Booklet Folder; SH-10: Staple fo Fax Syste Internet FA Data Securi Card Authentic	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s 8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS ERA Mobile Print (Standard) 32W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; 1), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm AH, JBIG DBS B Options Options PF-7120: 3,000 sheets Large capacity sid at Tray and Paper Pass Unit eets Finisher; MT-730(B): 7 Bin Mailbox; r BF-730; SH-12: Staple for DF-7110 m12 X Kit(E) attion Kit(B)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til etwork Printing perating Syster sterface SSB Memory Pri tobile Printing olor Selection esolution lie Format mage Type Mod ransmission Typ ddress Storage riginal Size oding Method ransmission Spr demory UAL FAX / Netw oner Kit flaintenance Kit aper Feeder inisher ax System oternet FAX ata Security ard Authentical igabit Ethernet	m Supported Inting Format Ide Dee Dee Dee Dee Dee Dee Dee	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf Tiff, JPEG, F AirPrint, Mopria, KYOI Scan Functions O Color (Color/Gray); Auto Color (Color/B: 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High— Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G 12; PF-740(B): 1,500 sheets Multimed DF-7110: 4,000 sh PH-7C: Punch Unit for DF-7110; BF-730: Booklet Folder; SH-10: Staple fo Fax Syste Internet FA Data Securit Card Authentic IB-50: For Additic	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS TERA Mobile Print (Standard) SWJ; Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; r), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm //H, JBIG // Scanning length: max. 1,600mm //	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til etwork Printing perating Syster sterface SB Memory Pri flobile Printing olor Selection esolution lle Format mage Type Mod ransmission Typ ddress Storage riginal Size oding Method ransmission Spa flemory UAL FAX / Netv boner Kit flaintenance Kit flai	m Supported Inting Format Ide Ide Ide Ide Ide Ide Ide Id	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, IVP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf TIFF, JPEG, F AirPrint, Mopria, KYO Scan Functions Ocolor (Color/Gray); Auto Color (Color/Bi 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High- Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address list Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G 12; PF-740(B): 1,500 sheets x2 (A4/Letter) PF-7130: 4,000 sh PH-7C: Punch Unit for DF-7110; BF-730: Booklet Folder; SH-10: Staple fo Fax Syste Internet FA Data Securi Card Authentic	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS TERA Mobile Print (Standard) SWJ; Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm AH, JBIG bbs B & Options (PF-7120: 3,000 sheets Large capacity sid ia Tray and Paper Pass Unit eets Finisher; MT-730(B): 7 Bin Mailbox; r BF-730; SH-12: Staple for DF-7110 m 12 X Kit(A) ty Kit(E) ation Kit(B) onal Network less LAN/WiFi Direct)	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Option Server 2012 R2, TK-8720 (C/M/V/K) MK-8720 (A/B)	
DL irst Print Out Til irst Print Out Til irst Print Out Til ietwork Printing iperating Syster interface ISB Memory Pri Mobile Printing olor Selection esolution ille Format mage Type Mod ransmission Typ ddress Storage irriginal Size oding Method ransmission Spe Memory UAL FAX / Netw Joner Kit Maintenance Kit aper Feeder inisher ax System internet FAX lata Security	m Supported Inting Format Ide Ide Ide Ide Ide Ide Ide Id	5.8/ - seconds TCF Windows Server 2003 USB 2.0 High Speedx1; Ethernet 10BASE-T/: Auto TIFF, JPEG, XPS, Ope	(PCL-XL, PCL 5c), KPDL3 (Postscript 3 com 5.4/ - seconds 5.4/ - seconds 7/IP, NetBEUI, FTP, Port 9100, LPR, IPP, IPP, Windows Server 2008, Windows Server Windows Vista, Windows 7, Window Apple Macintosh OS X 100BASE-TX/1000BASE-T; USB Host Interf Tiff, JPEG, F AirPrint, Mopria, KYO Scan Functions O Color (Color/Gray); Auto Color (Color/B: 600dpi, 400dpi, 300dpi, 200dp nXPS, PDF (MMR/JPG compression/High— Text, Photo, Text + Photo, Scan to E-mail; Scan to FTP or FTP over S 2,000 addresses (Common address lis Fax Functions Max. A3 (Ledger) - Min. A6 (Statement MMR, MR, N 33.6 kg 170M Yes Consumables TK-6720 MK-6725G 12; PF-740(B): 1,500 sheets Multimed DF-7130: 500 sheets Multimed DF-7110: 4,000 sh PH-7C: Punch Unit for DF-7110; BF-730: Booklet Folder; SH-10: Staple fo Fax Syste Internet FA Data Securit Card Authentic IB-50: For Additic IB-50: For Additic	patible), XPS, OpenXPS, PDF Direct Print 4.3/ - seconds over SSL/TLS, WSD Print, Apple Bonjour 2008 R2, Windows Server 2012, Windows s8, Windows 8.1, Windows 10; 10.5 or later; Linux ace (USB Host)x4; NFC TAGx1; 802.11 b/s DF, XPS CERA Mobile Print (Standard) &W); Full Color; Grayscale; Black & White i, 200x400dpi, 200x100dpi compression PDF), PDF/A, Encrypted PDF Text (Fine Line), OCR SL; Scan to USB; TWAIN Scan; WSD Scan; t), 500 groups (Group address list) (Optional) // Scanning length: max. 1,600mm //H, JBIG // Scanning length:	4.9/6.1 seconds is Server 2012 R2, g/n/Wireless LAN/WiFi Direct (Options s, Searchable PDF WIA Scan TK-8720 (C/M/Y/K) MK-8720 (A/B)	







Company details

*KYOCERA does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

KYOCERA Business Partner